

PERFIL / PROFILE / PROFIL AP250

PERFIL POLIVALENTE


APLICACIONES: CUBIERTAS CON LUCES MEDIAS-ALTAS

CARACTERÍSTICAS: EXCELENTE RELACIÓN INERCIA / PESO

ACABADOS: LISO O PERFORADO TOTAL / PARCIAL.



DIMENSIONES / Dimensions / Dimensions

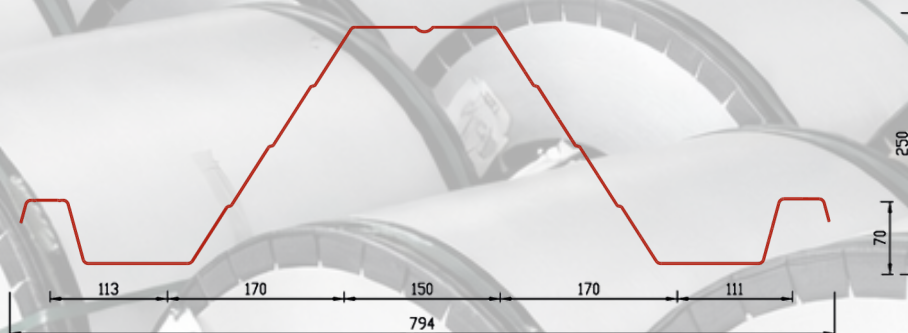

CARACTERÍSTICAS MECÁNICAS / Mechanical features / Caractéristiques mécaniques

Acero Steel Acier	Thickness Épaisseur	Area Région	Weight Poids	Iz (cm4/m)	Iy (cm4/m)	Vy (cm)	Vpy (cm)	Wyinf (cm3/m)	Wysup (cm3/m)	Mrd (KNm/m)	Nrd (KN/m)
S250	0,80	12,79	10,04	7.988,18	1.016,14	10,20	14,85	99,67	68,42	17,11	319,68
	0,90	14,39	11,30	8.986,71	1.143,16	10,20	14,85	112,13	76,98	19,24	359,63
	1,00	15,98	12,56	9.985,24	1.270,18	10,20	14,85	124,59	85,53	21,38	399,62
	1,25	19,98	15,69	12.481,54	1.587,73	10,20	14,85	155,74	106,91	26,73	499,53
	1,50	23,98	18,83	14.977,86	1.905,28	10,20	14,85	186,88	128,29	32,07	599,40
S280	0,80	12,79	10,04	7.988,18	1.016,14	10,20	14,85	99,67	68,42	19,16	358,04
	0,90	14,39	11,30	8.986,71	1.143,16	10,20	14,85	112,13	76,98	21,55	402,79
	1,00	15,98	12,56	9.985,24	1.270,18	10,20	14,85	124,59	85,53	23,95	447,58
	1,25	19,98	15,69	12.481,54	1.587,73	10,20	14,85	155,74	106,91	29,93	559,47
	1,50	23,98	18,83	14.977,86	1.905,28	10,20	14,85	186,88	128,29	35,92	671,33
S320	0,80	12,79	10,04	7.988,18	1.016,14	10,20	14,85	99,67	68,42	21,90	409,19
	0,90	14,39	11,30	8.986,71	1.143,16	10,20	14,85	112,13	76,98	24,63	460,33
	1,00	15,98	12,56	9.985,24	1.270,18	10,20	14,85	124,59	85,53	27,37	511,52
	1,25	19,98	15,69	12.481,54	1.587,73	10,20	14,85	155,74	106,91	34,21	639,40
	1,50	23,98	18,83	14.977,86	1.905,28	10,20	14,85	186,88	128,29	41,05	767,23